
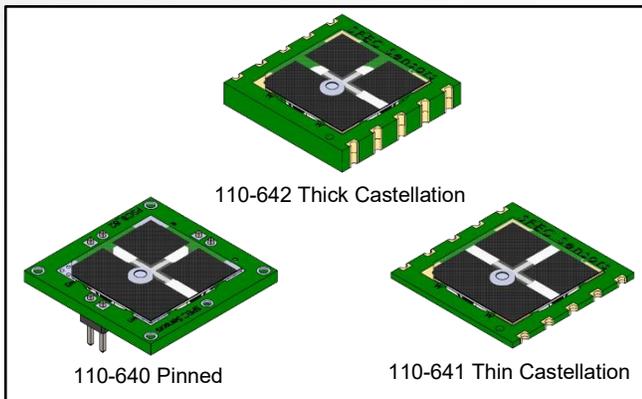


High Sensitivity Sulfur Dioxide (SO₂) Sensor

110-64x

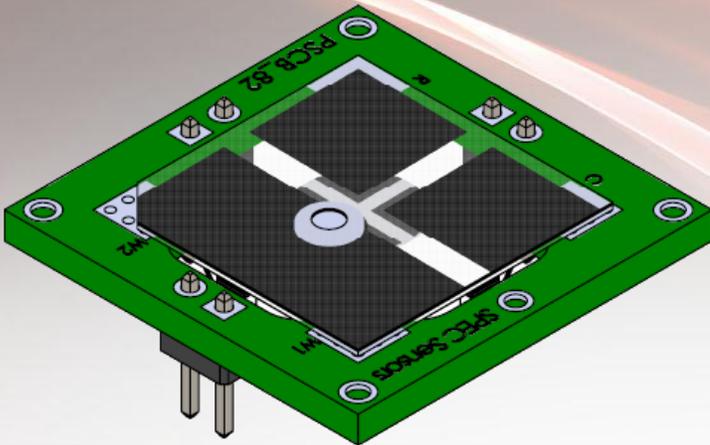

Interlink Electronics Screen Printed Electrochemical sensor (SPEC Sensor™) revolutionizes the current state of the art, enabling new applications in consumer, medical and industrial safety. Interlink Electronics offer the performance of the best quality electrochemical sensors at a fraction of the price. The 110-64x family High Sensitivity Sulfur Dioxide sensors are small and low-profile, facilitating easy integration into wireless, portable, and other IoT solutions. These sensors are ideal for health, food, environmental, industrial, and residential monitoring, because of their high performance, low cost, and small size. IE'S High Sensitivity Sulfur Dioxide Sensor are available in three packages (110-640, 110-641, 110-642).

FEATURES


- Small Size & Low Profile
- Improved stability and low ppb sensitivity
- Accurate & Linear Response
- Long Life (10 +years)
- Fast Response
- 100% Factory Tested
- Ultra-Low Power < 50 uW max
- ROHS Compliant

APPLICATIONS

- Outdoor Air Quality
- Indoor Air Quality
- Weather Stations
- Internet of Things
- Smart Homes
- Industrial Safety

The diagram below shows the basic measuring circuit for the 110-64x. The sensor generates an electric current which is converted into output voltage (Vout) using a linear circuit like the one shown.

Notes: $V_{bias} = V_w - V_r$

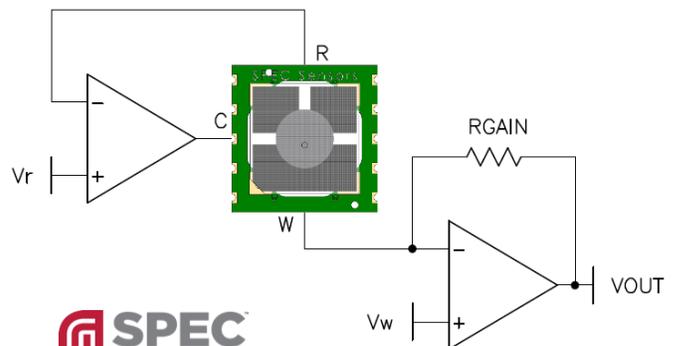

SPECIFICATIONS

Parameter	Typical Value	Unit	Notes
Measurement Range	0 to 2	ppm	1,2,3
Lower Detection Limit	0.01	ppm	1,2
Resolution	0.005	ppm	1,2
Accuracy	± 5	%	1
Response Time – T (90)	< 30	seconds	1
Sensitivity Range	65 ± 25	nA/ppm	1
Expected Operating Life	10	years	1
Operating Temperature Range	-30 to 55	°C	3
Operating Humidity Range	10 to 95	%	3,4
Operating Pressure Range	0.8 to 1.2	atm	3
Operating Bias Range	0	mV	
Power Consumption	10 to 50	uW	2

1. At standard conditions (25 °C, 50% RH, 1 atm), unless otherwise indicated.
2. Depends on circuit design.
3. Recommended operating range. The sensor may be damaged, and warranty voided if operated outside the specified range. For the best optimum accuracy operate sensor at -20 to 40 °C and 15 to 90% RH.
4. Non-condensing.

CROSS SENSITIVITY

Most chemical sensors exhibit some cross-sensitivity to other gases. The following table lists the relative response of common potential interfering gases, and the concentration at which the data was gathered.

Gas/Vapor	Concentration	Typical Response as PPM SO ₂
Sulfur Dioxide	10 ppm	10.0
Hydrogen	200 ppm	0.4
Nitrogen Dioxide	5 ppm	-9.1
Ozone	0.82 ppm	-0.8
Carbon Monoxide	400 ppm	0
Hydrogen Sulfide	25 ppm	97.1
Ethanol	200 ppm	0
Formaldehyde	10 ppm	0
Ethylene	50 ppm	0
Chlorine	10 ppm	-8.7
Nitric Oxide	10 ppm	0
Ammonia	100 ppm	0.2

Information furnished by Interlink Electronics is believed to be accurate and reliable "as is". However, no responsibility is assumed by Interlink Electronics for any use of such information, nor for any infringements of patents or other rights of third parties that may result from its use. Specifications subject to change without notice. No license is granted by implication or otherwise under any patent or patent rights of Interlink Electronics. Trademarks and registered trademarks are the property of their respective owners.

CONTACT US

48389 Fremont Blvd.
Suite 110
Fremont, CA 94538

Toll Free: +1.866.764.8965
Phone: +1.805.484.8855
Fax: +1.805.530.5598

Visit:

www.interlinkelectronics.com

Email:

sales@interlinkelectronics.com